

# VAT TYPE-FLEX HINGED FASTENERS

VAT type-Flex hinged fasteners are suitable for conveyor belts working on troughing idlers for the transport of loose products.


The ease of breaking-up of the single plates, when stressed with transverse bending, and the fastening by a flexible cable, enable the adaption of the hinged fasteners to the conveyor belt support rollers.

## FLEX 10

Copper nails  
(mm)



Ø 3.4 X 18

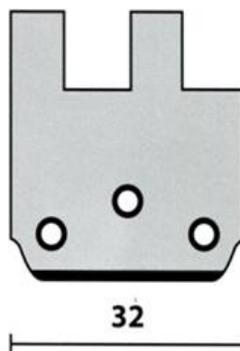

Type-Flex hinged fasteners are produced in galvanised iron and non-magnetic stainless steel which are fastened by means of copper nails whose round section allows an excellent tensile stress resistance performance. They can be applied in the workshop and on the construction site by using a hammer and cutting pliers.

### Specific characteristics

- High resistance to tensile stress
- Flexibility of the fastener in transverse sense

### Content of standard box

**FLEX 10 INOX** 8 X 512 mm Hinged Fasteners  
**m 2** 392 Copper Nails  
m 2.5 Plastic-Coated Stainless Steel Wire Ø 5.5 mm

Type	Conveyor Belt Thickness (mm)	Min. Pulley Diameter (mm)	Flexible Cable Diameter (mm)	Maximum recommended working load daN/cm
FLEX 10	7.0 - 9.0	140	5.5	24



**V.A.T. SRL**  
Conveyor belt fasteners