

VAT TYPE-NY 30 PLASTIC HINGED FASTENERS

These are normally produced in **Nylon PA66** but, upon request, they can be produced in other plastic materials.

NY fasteners are suitable to come into contact with all types of food products and they are particularly resistant to oily and greasy products.




They can be used in presence of metal detector and X Rays.

The hinged fastener, which consists of 49 mm large modular interlocking elements that can be snap-fitted by simply applying the pressure of your thumb, makes it possible to join conveyor belts with a multi-width of 50 mm.

The application is possible by using a Ø 6.5 mm die-cutter that is guided by the adhesives supplied with the fasteners.

The boxes include a nylon monofilament used to join the two conveyor belt ends and adhesives to be applied as templates for the die-cutting operations.

Every box contains the elements necessary to join the ends of a 2 metres large conveyor belt as well as installation instructions.

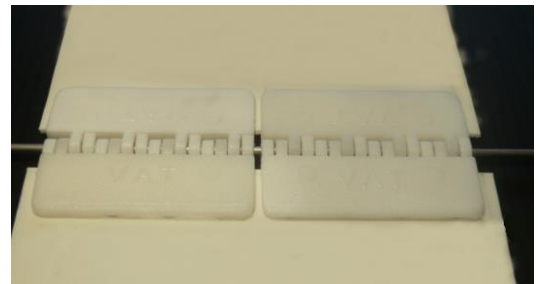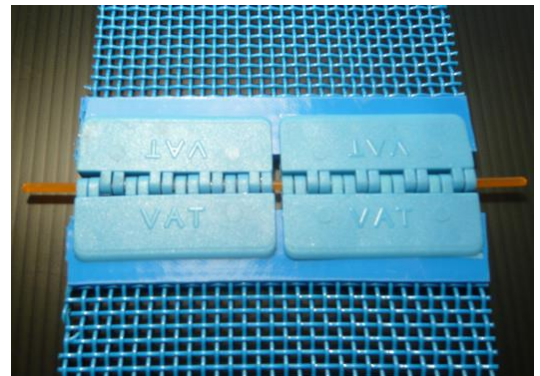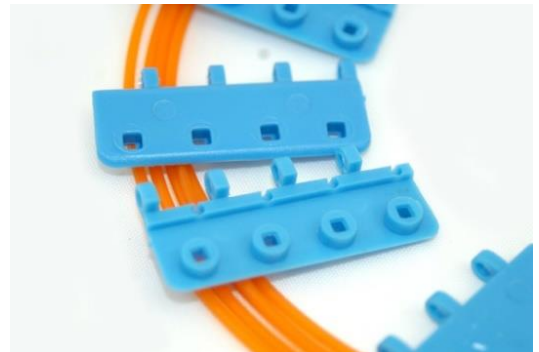

Technical Data

Type	Colour	Temperature C°	Abrasion Resistance	Conveyor Belt Thickness (mm)	Recommended U.T.S. (daN/cm)	Min. Pulley Diameter (mm)
NY 30-W 2 m	White	-40+140	Excellent	1.5 - 3	8.0	70
NY 30-LB 2 m	Light Blue	-40+140	Excellent	1.5 - 3	8.0	70

U.T. S. = Ultimate Tensile Strength



V.A.T. SRL
Conveyor belt fasteners